



Zener Barrier Z910



- 1-channel
- AC version
- Working voltage 6.5 V at 10 μ A
- Series resistance max. 56 Ω
- Fuse rating 100 mA
- DIN rail mountable



Function

The Zener Barrier prevents the transfer of unacceptably high energy from the safe area into the hazardous area. The zener diodes in the Zener Barrier are connected in the reverse direction. The breakdown voltage of the diodes is not exceeded in normal operation. If this voltage is exceeded, due to a fault in the safe area, the diodes start to conduct, causing the fuse to blow. The Zener Barrier has alternating polarities, i. e. interconnected zener diodes are employed and one side is grounded. The Zener Barrier can be used for both alternating voltage signals and direct voltage signals.

Connection

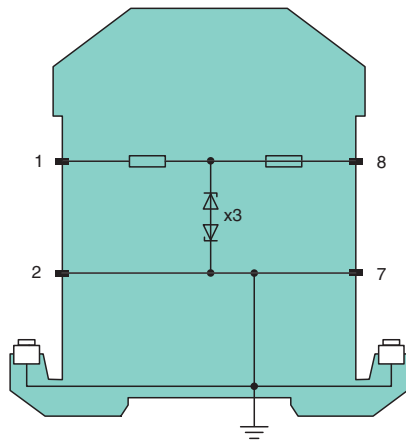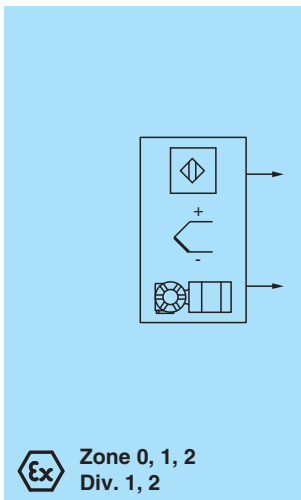

Zone 2
Div. 2

Technical Data

General specifications

Type AC version

Electrical specifications

Nominal resistance 50 Ω
 Series resistance max. 56 Ω
 Fuse rating 100 mA

Hazardous area connection

Connection terminals 1, 2

Safe area connection

Connection terminals 7, 8
 Working voltage

Release date: 2023-04-06 Date of issue: 2023-04-06 Filename: 071773_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PF PEPPERL+FUCHS

Technical Data

| | | |
|--|----------------|---|
| Supply loop | | max. 8.8 V |
| Measurement loop | | max. 6.5 V at 10 μ A |
| Conformity | | |
| Degree of protection | | IEC 60529 |
| Ambient conditions | | |
| Ambient temperature | | -20 ... 60 °C (-4 ... 140 °F) |
| Storage temperature | | -25 ... 70 °C (-13 ... 158 °F) |
| Relative humidity | | max. 75 % , without condensation |
| Mechanical specifications | | |
| Degree of protection | | IP20 |
| Connection | | screw terminals |
| Core cross section | | max. 2 x 2.5 ... mm ² |
| Mass | | approx. 150 g |
| Dimensions | | 12.5 x 115 x 116 mm (0.5 x 4.5 x 4.6 inch) (W x H x D) |
| Construction type | | modular terminal housing , see system description |
| Mounting | | on 35 mm DIN mounting rail acc. to EN 60715:2001 |
| Data for application in connection with hazardous areas | | |
| EU-type examination certificate | | BAS 01 ATEX 7005 |
| Marking | | Ⓔ II (1)GD, I (M1) [Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I |
| Voltage | U _o | 9.94 V |
| Current | I _o | 203 mA |
| Power | P _o | 500 mW |
| Supply | | |
| Maximum safe voltage | U _m | 250 V |
| Series resistance | | min. 49 Ω |
| Certificate | | TÜV 99 ATEX 1484 X |
| Marking | | Ⓔ II 3G Ex nA IIC T4 Gc |
| Directive conformity | | |
| Directive 2014/34/EU | | EN IEC 60079-0:2018+AC:2020 , EN 60079-11:2012 , EN 60079-15:2010 |
| International approvals | | |
| FM approval | | |
| Control drawing | | 116-0118 |
| UL approval | | |
| Control drawing | | 116-0139 (cULus) |
| IECEX approval | | |
| IECEX certificate | | IECEX BAS 09.0142 IECEX BAS 17.0091X |
| IECEX marking | | [Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc |
| General information | | |
| Supplementary information | | Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com . |

Assembly

Front view

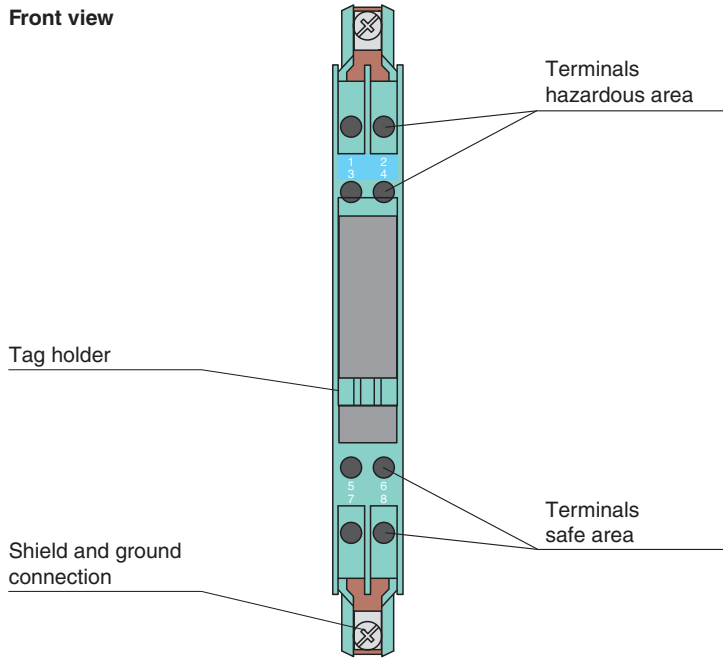

Matching System Components

| | | |
|---|------------------------|--|
|  | ZH-ES/LB | Insertion Strip |
|  | ZH-Z.AB/NS | Mounting block for DIN mounting rail |
|  | ZH-Z.AB/SS | Mounting block for grounding rail |
|  | ZH-Z.AK16 | Connection terminal for grounding rail |
|  | ZH-Z.AR.125 | Spacing Roller |
|  | ZH-Z.BT | Label Carrier |
|  | ZH-Z.ES | Single Socket |
|  | ZH-Z.LL | Ground Rail Feed |
|  | ZH-Z.NLS-Cu3/10 | Grounding Rail |
|  | USLKG5 | Terminal block for equipotential bonding |

Release date: 2023-04-06 Date of issue: 2023-04-06 Filename: 071773_eng.pdf