

Solenoid Driver KFD2-RCI-Ex1

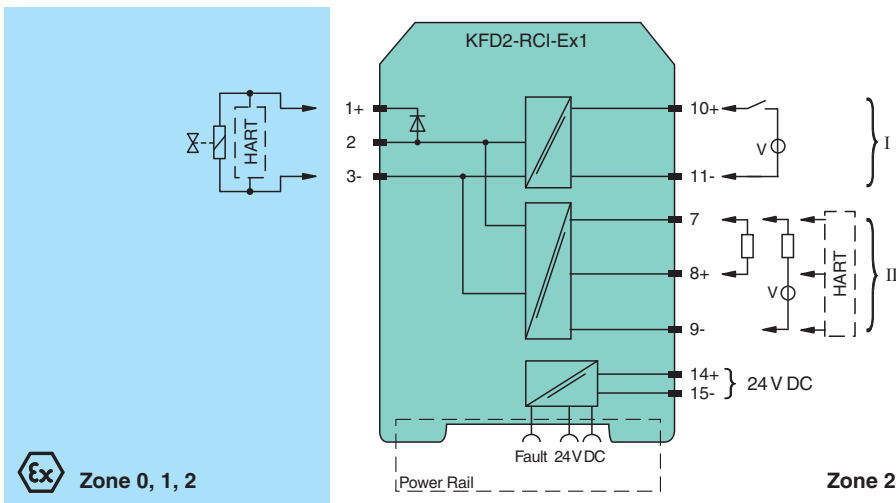
- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Output 20.4 mA at 13.5 V DC
- 19 V DC ... 30 V DC input
- Line fault detection (LFD)
- Conformal coating
- Up to SIL 3 acc. to IEC/EN 61508



Function

This isolated barrier is used for intrinsic safety applications. The device can be used in shut down applications with HART positioners. Via the logic input the positioner is energized or de-energized (shut down). Independent of the status, a second input enables HART communication with the positioner. With this the asset management system can request for example diagnostic information or can initiate a partial stroke test. The HART communication also works with deenergized positioner. A unique collective error messaging feature is available when used with the Power Rail system.

Connection



Technical Data

General specifications	
Signal type	Digital Output
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 3
Supply	
Connection	Power Rail or terminals 14+, 15-
Rated voltage	U_r 19 ... 30 V DC
Rated current	I_r < 35 mA
Power consumption	< 0.8 W
Input	
Connection side	control side

Release date: 2022-01-17 Date of issue: 2022-01-17 Filename: 216568_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Connection		terminals 10+, 11-
Input current		40 mA at 19 ... 30 V DC
Signal level		1-signal: 19 ... 30 V DC 0-signal: 0 ... 5 V DC
Power consumption		< 1.2 W
Operating mode		loop powered
Output		
Connection side		field side/control side
Connection		terminals 1+, 3- (terminals 1+, 2 for test loop)
Internal resistor	R_i	approx. 275 Ω
Current	I_e	≤ 20.4 mA
Voltage	U_e	≥ 13.5 V
Open loop voltage	U_s	> 16 V
Voltage		1-signal: > 13.5 V
Current		1-signal: 20.4 A 0-signal: 4.2 mA
Load		max. 650 Ω
Response time		< 40 ms input to output
Line fault detection		short circuit voltage < 1 V , open circuit voltage > 16 V
Output II		
Connection		terminal 7: source (-) or sink (+), terminal 8: source (+), terminal 9: sink (-)
Current		11 mA (source or sink mode)
Voltage		9 ... 30 V sink mode from external supply
Load		max. 650 Ω , source mode , for HART ≥ 230 Ω
Communication		pass-through of HART signal between input II and output
Galvanic isolation		
Input/power supply		functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}
Output II/power supply		functional insulation acc. to IEC 62103, rated insulation voltage 50 V _{eff}
Indicators/settings		
Display elements		LEDs
Control elements		DIP switch
Configuration		via DIP switches
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2012
Degree of protection		IEC 60529:2001
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 150 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) (W x H x D) , housing type B2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		CESI 09 ATEX 037
Marking		Ⓜ II (1)GD [Ex ia] IIC; [Ex iaD] [circuit(s) in zone 0/1/2/20/21/22]
Equipment		terminals 1+, 2 / 3-
Voltage	U_o	24.5 V
Current	I_o	93.6 mA
Power	P_o	595 mW (linear characteristic)

Release date: 2022-01-17 Date of issue: 2022-01-17 Filename: 216568_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

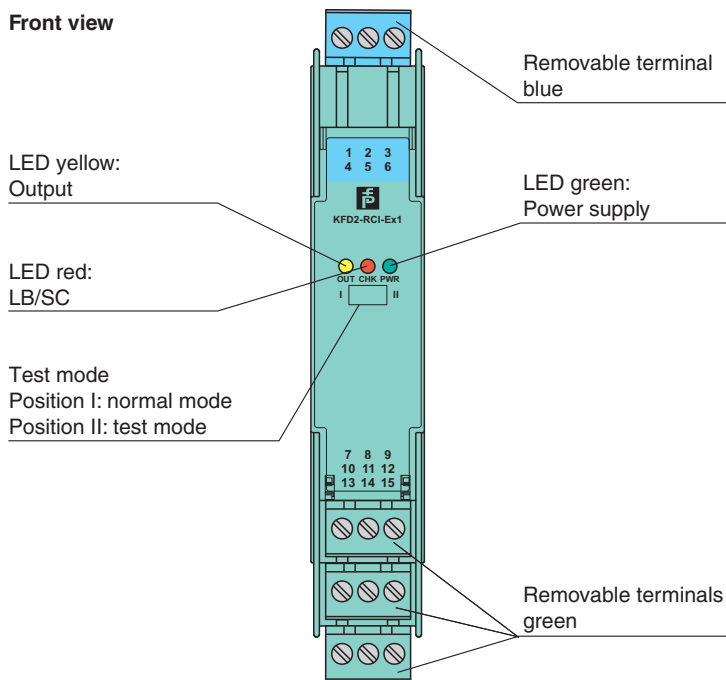
Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data



Supply			
Maximum safe voltage	U_m	253 V (Attention! The rated voltage can be lower.)	
Input			
Maximum safe voltage	U_m	253 V (Attention! The rated voltage can be lower.)	
Collective error message			
Maximum safe voltage	U_m	253 V (Attention! The rated voltage can be lower.)	
Certificate			
		PF 09 CERT 1438 X	
Marking			
		Ⓜ II 3G Ex nA IIC T4 Gc	
Galvanic isolation			
Output I/other circuits	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V		
Directive conformity			
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010		
International approvals			
CSA approval			
Control drawing	116-0335		
IECEx approval			
IECEx certificate	IECEx CES 09.0008		
IECEx marking	[Ex ia] IIC , [Ex iaD]		
General information			
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .		

Assembly







Release date: 2022-01-17 Date of issue: 2022-01-17 Filename: 216568_eng.pdf

Matching System Components




	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Matching System Components

	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Accessories

	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue
	KF-CP	Red coding pins, packaging unit: 20 x 6

Application

The device supplies power to safety valve controller with HART functionality.

It is controlled by means of a logic circuit. Voltage signals in a range of 19 V DC ... 30 V DC are accepted as 1-signal. The 0-signal must be within a range of 0 V DC ... 5 V DC. The current consumption of the logic input is about 40 mA.

At full load, 13.5 V at 20.4 mA is available for the hazardous area load.

Line fault detection of the field circuit is indicated by a red LED. The error signal switches on if the field voltage is > 16 V for lead breakage (LB) or < 1 V for short circuit (SC).

This device provides the HART pass-through for maintenance and diagnostic of the solenoid valve. The HART communication is available both in ON condition and in OFF condition of the solenoid.