

# Switch Amplifier

## KFA6-SR2-Ex2.W.IR


- 2-channel isolated barrier
- 230 V AC supply
- Dry contact or NAMUR inputs
- Latching relay contact output
- Line fault detection (LFD)



### Function

This isolated barrier is used for intrinsic safety applications. The device is used for level control, pump control and other switching applications. The device transfers digital signals from NAMUR sensors or dry contacts from the hazardous area to the non-hazardous area. The device is easily configured by the use of DIP switches. A fault is signaled by LEDs.

### Connection

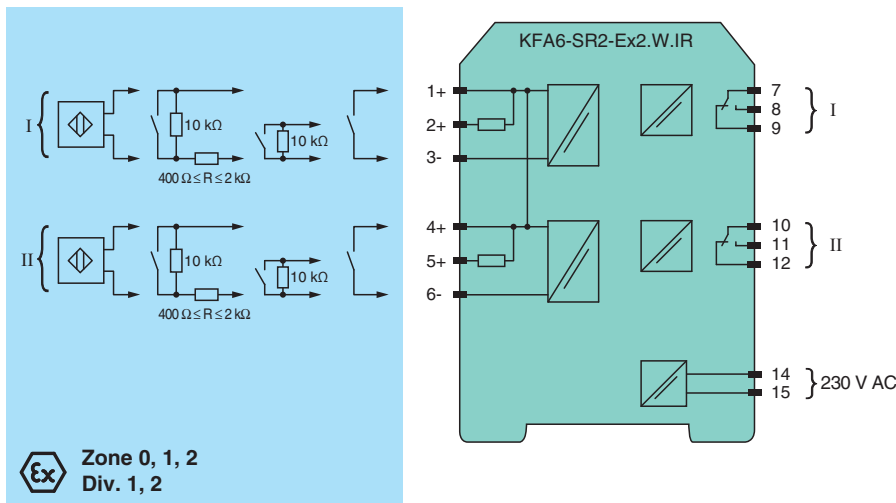

### Technical Data

#### General specifications

Signal type	Digital Input		
<b>Supply</b>			
Connection	terminals 14, 15		
Rated voltage	$U_r$	207 ... 253 V AC, 45 ... 65 Hz	
Power consumption	max. 1.5 W		
<b>Input</b>			
Connection side	field side		
Connection	terminals 1+, 2+, 3-; 4+, 5+, 6-		
Rated values	acc. to EN 60947-5-6 (NAMUR)		
Open circuit voltage/short-circuit current	approx. 8 V DC / approx. 8 mA		

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

## Technical Data

Line fault detection	breakage $I \leq 0.1 \text{ mA}$ , short-circuit $I > 6 \text{ mA}$	
Pulse/Pause ratio	min. 10 ms / min. 10 ms	
<b>Output</b>		
Connection side	control side	
Connection	output I: terminals 7, 8, 9 ; output II: terminals 10, 11, 12	
Output I, II	signal ; relay	
Contact loading	253 V AC/2 A/cos $\phi > 0.7$ ; 126.5 V AC/4 A/cos $\phi > 0.7$ ; 40 V DC/2 A resistive load	
Energized/De-energized delay	approx. 20 ms / approx. 20 ms	
Mechanical life	$10^7$ switching cycles	
<b>Transfer characteristics</b>		
Switching frequency	$\leq 10 \text{ Hz}$	
<b>Galvanic isolation</b>		
Input/Output	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>	
Input/power supply	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>	
Output/power supply	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>	
Output/Output	reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>	
<b>Indicators/settings</b>		
Display elements	LEDs	
Labeling	space for labeling at the front	
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)	
Low voltage		
Directive 2014/35/EU	EN 61010-1:2010	
<b>Conformity</b>		
Electromagnetic compatibility	NE 21:2006	
Degree of protection	IEC 60529:2001	
Input	EN 60947-5-6:2000	
<b>Ambient conditions</b>		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
<b>Mechanical specifications</b>		
Degree of protection	IP20	
Connection	screw terminals	
Mass	approx. 150 g	
Dimensions	20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) (W x H x D) , housing type B2	
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001	
<b>Data for application in connection with hazardous areas</b>		
EU-type examination certificate	PTB 00 ATEX 2081	
Marking	Ⓢ II (1)G [Ex ia Ga] IIC Ⓢ II (1)D [Ex ia Da] IIIC Ⓢ I (M1) [Ex ia Ma] I	
Input	Ex ia	
Voltage	U <sub>o</sub>	10.6 V
Current	I <sub>o</sub>	19.1 mA
Power	P <sub>o</sub>	51 mW (linear characteristic)
<b>Supply</b>		
Maximum safe voltage	U <sub>m</sub>	253 V AC (Attention! U <sub>m</sub> is no rated voltage.)
<b>Output</b>		
Contact loading	253 V AC/2 A/cos $\phi > 0.7$ ; 126.5 V AC/4 A/cos $\phi > 0.7$ ; 40 V DC/2 A resistive load	
Maximum safe voltage	U <sub>m</sub>	253 V AC (Attention! The rated voltage can be lower.)
<b>Galvanic isolation</b>		
Input/input	not available	
Input/Output	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V	
Input/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V	

Release date: 2022-01-10 Date of issue: 2022-01-10 Filename: 107093\_eng.pdf


Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

**Technical Data**


<b>Directive conformity</b>	
Directive 2014/34/EU	EN IEC 60079-0:2018+AC:2020 , EN 60079-11:2012
<b>International approvals</b>	
FM approval	
Control drawing	116-0035
UL approval	
Control drawing	116-0145
CSA approval	
Control drawing	116-0047
IECEX approval	
IECEX certificate	IECEX PTB 11.0031
IECEX marking	[Ex ia Ga] IIC [Ex ia Da] IIIC [Ex ia Ma] I
<b>General information</b>	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Assembly**

Front view

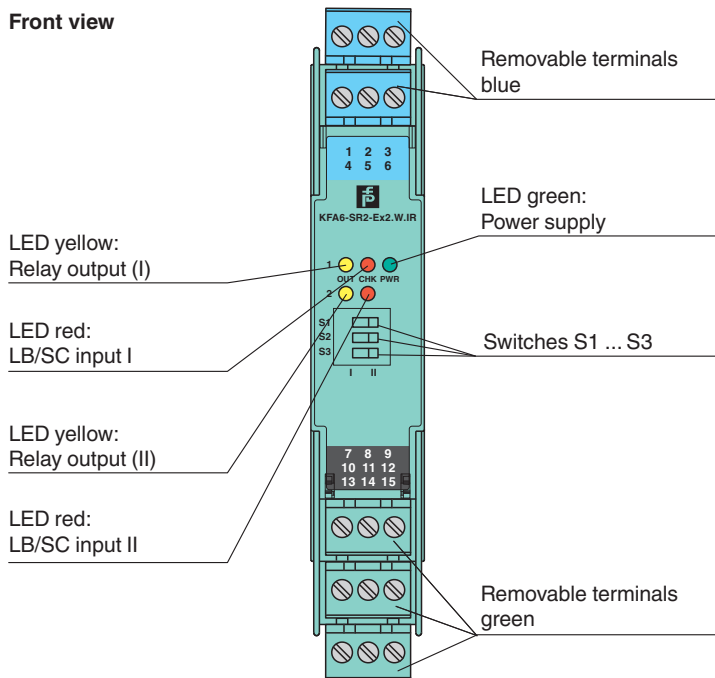

**Matching System Components**

	<b>K-DUCT-BU</b>	Profile rail, wiring comb field side, blue
---	------------------	--




**Accessories**

	<b>F-NR3-Ex1</b>	NAMUR Resistor Network
---	------------------	------------------------


Release date: 2022-01-10 Date of issue: 2022-01-10 Filename: 107093\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

**Accessories**

	<b>KF-ST-5GN</b>	Terminal block for KF modules, 3-pin screw terminal, green
	<b>KF-ST-5BU</b>	Terminal block for KF modules, 3-pin screw terminal, blue
	<b>KF-CP</b>	Red coding pins, packaging unit: 20 x 6

**Configuration**

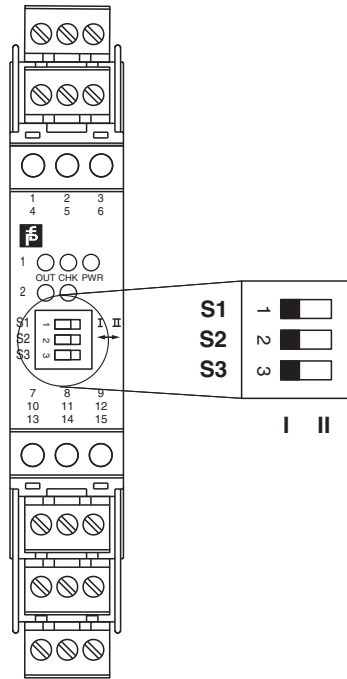

**Switch position**

S	Function		Position
1	Mode of operation output I (relay) energized	with high input current	I
		with low input current	II
2	Mode of operation output II (relay) energized	with high input current	I
		with low input current	II
3	Line fault detection	ON	I
		OFF	II

**Operating states**

Control circuit	Input signal
Initiator high impedance/contact opened	low input current
Initiator low impedance/contact closed	high input current
Lead breakage, lead short circuit	Line fault

Factory setting: switch 1, 2 and 3 in position I

Release date: 2022-01-10 Date of issue: 2022-01-10 Filename: 107093\_eng.pdf