

Current Driver

KFD2-CD-Ex1.32-2


- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current input 0 mA ... 20 mA
- Current output 4 mA ... 20 mA
- Accuracy 0.1 %



Function

This isolated barrier is used for intrinsic safety applications. The device drives I/P converters, electrical valves, and positioners in the hazardous area. The device has current input and current output. A current limit circuit in series to terminal 9 protects the device from damage. The maximum voltage drop at the input is 4 V DC, allowing for the connection of several devices due to the low voltage drop in order to maintain multiple galvanically isolated outputs (signal duplication). The open circuit voltage is 24 V DC within the allowable supply voltage range at terminals 1 and 2. The maximum load that can be applied is 850 Ω. The device is not SIL-rated, because the open circuit at the input does not output a safe state (4 mA or 1 V).

Connection

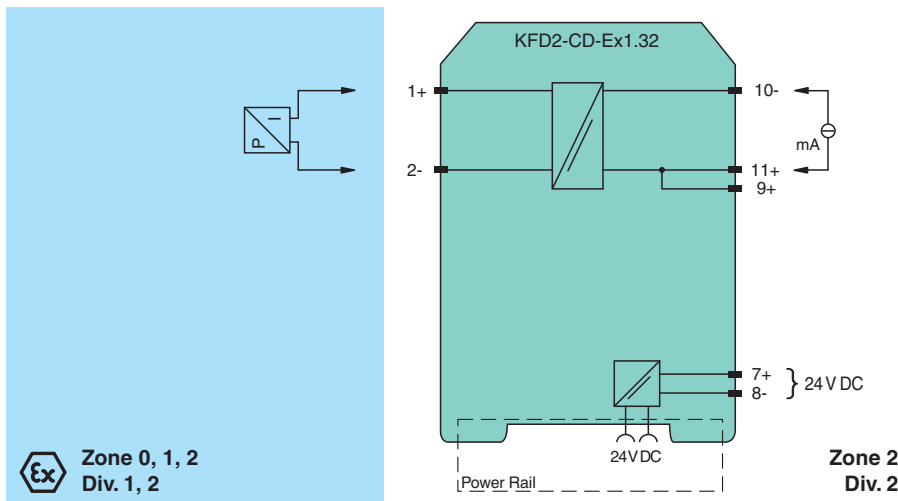

Technical Data

General specifications	
Signal type	Analog output
Supply	
Connection	Power Rail or terminals 7+, 8-
Rated voltage	U_r 20 ... 35 V DC
Ripple	within the supply tolerance
Rated current	I_r max. 50 mA
Power dissipation	1.4 W
Input	

Release date: 2021-12-16 Date of issue: 2021-12-16 Filename: 295072_eng.pdf

Technical Data

Connection side	control side
Connection	terminals 9+, 10-, 11+
Voltage drop	approx. 4 V at 20 mA
Input current	≤ 100 µA up to 50 °C (122 °F) at 10 V
Limit	max. 40 mA
Transmission range	0 ... 20 mA
Output	
Connection side	field side
Connection	terminals 1+, 2-
Voltage	17 V at 20 mA
Current	4 ... 20 mA
Load	max. 850 Ω
Transfer characteristics	
Deviation	at 20 °C (68 °F), 4 ... 20 mA < 0.1 % of full scale, incl. non-linearity and hysteresis
Influence of ambient temperature	≤ ± 0.01 %/K
Rise time	< 10 ms
Galvanic isolation	
Input/power supply	functional insulation, rated insulation voltage 50 V AC
Indicators/settings	
Display elements	LED
Labeling	space for labeling at the front
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)
Conformity	
Degree of protection	IEC 60529:2001
Protection against electrical shock	UL 61010-1:2012
Ambient conditions	
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)
Mechanical specifications	
Degree of protection	IP20
Connection	screw terminals
Mass	approx. 100 g
Dimensions	20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) (W x H x D), housing type B1
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas	
EU-type examination certificate	BAS 02 ATEX 7203 X
Marking	⊕ II (1)G [Ex ia Ga] IIC, ⊕ II (1)D [Ex ia Da] IIIC, ⊕ I (M1) [Ex ia Ma] I
Certificate	TÜV 99 ATEX 1499 X
Marking	⊕ II 3G Ex nA II T4
Directive conformity	
Directive 2014/34/EU	EN IEC 60079-0:2018+AC:2020, EN 60079-11:2012, EN 60079-15:2010
International approvals	
FM approval	
Control drawing	116-0440
UL approval	
Control drawing	116-0441 (cULus)
IECEx approval	
IECEx certificate	IECEx BAS 05.0041X IECEx CML 19.0051X
IECEx marking	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I Ex ec IIC T4 Gc
General information	

Release date: 2021-12-16 Date of issue: 2021-12-16 Filename: 295072_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


 **PEPPERL+FUCHS**

Technical Data







Supplementary information Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com.

Assembly

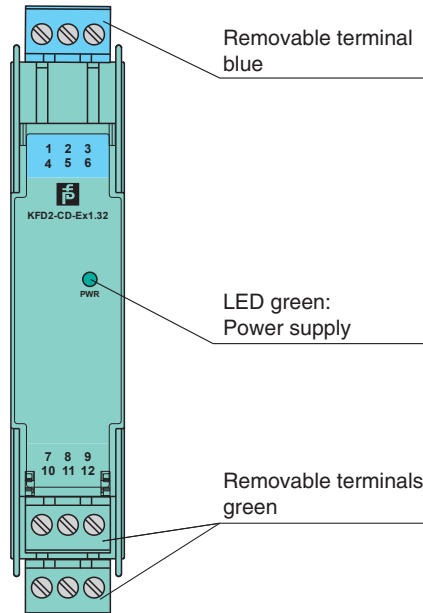

Front view



Matching System Components

	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue


Accessories

	KF-ST-5GN	Terminal block for KF modules, 3-pin screw terminal, green
	KF-ST-5BU	Terminal block for KF modules, 3-pin screw terminal, blue

Release date: 2021-12-16 Date of issue: 2021-12-16 Filename: 295072_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Accessories

	KF-CP	Red coding pins, packaging unit: 20 x 6
---	--------------	---